

JEW

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of

FLYNN

Serial No. 10/715,368

Filed: November 19, 2003

For: DATA PROCESSING PERFORMANCE CONTROL



Atty. Ref.: 550-489

TC/A.U.:

Examiner:

\* \* \* \* \*

June 15, 2004

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Sir:

**SUBMISSION OF PRIORITY DOCUMENTS**

It is respectfully requested that this application be given the benefit of the foreign filing date under the provisions of 35 U.S.C. §119 of the following, a certified copy of which is submitted herewith:

<u>Application No.</u>	<u>Country of Origin</u>	<u>Filed</u>
0300713.5	UK	13 January 2003
0300712.7	UK	13 January 2003
0300710.1	UK	13 January 2003
0301852.0	UK	27 January 2004

Respectfully submitted,

**NIXON & VANDERHYE P.C.**

By: \_\_\_\_\_

Stanley C. Spooner  
Reg. No. 27,393

SCS:kmm  
1100 North Glebe Road, 8th Floor  
Arlington, VA 22201-4714  
Telephone: (703) 816-4000  
Facsimile: (703) 816-4100



INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed



Dated 11 November 2003

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

P015271GBP

2. Patent application number

(The Patent Office will fill in this part)

0301852.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ARM Limited  
110 Fulbourn Road  
Cherry Hinton  
Cambridge  
CB1 9NJ, United Kingdom

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

7498124002

4. Title of the invention

DATA PROCESSING PERFORMANCE CONTROL

5. Name of your agent (if you have one)

D Young & Co

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

21 New Fetter Lane  
London  
EC4A 1DA

Patents ADP number (if you know it)

59006 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

UK

0300712.7

13 January 2003

UK

0300710.1

13 January 2003

UK

0300713.5

13 January 2003

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))


9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form 0

Description 16

Claim(s) 6

Abstract 1

Drawing(s) 12 + 12 

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0


Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 0

Request for substantive examination (Patents Form 10/77) 0

Any other documents (please specify) 0

11. I/We request the grant of a patent on the basis of this application.

Signature 

Date 27 January 2003

D Young & Co (Agents for the Applicants)

12. Name and daytime telephone number of person to contact in the United Kingdom Nigel Robinson 023 8071 9500

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

# Patents Form 7/77

Patents Act 1977  
(Rule 15)




7/77 D/C  
20 FEB 2003 10:00 AM

## Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference	P015271GBP	
2. Patent application number (if you know it)	0301852.0	
3. Full name of the or of each applicant	ARM Limited	
4. Title of the invention	Data Processing Performance Control	
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent	By Virtue of Employment	
6. How many, if any, additional Patents Forms 7/77 are attached to this form? (see note (c))	0	
7.	<p>I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.</p> <p>Signature  Date 19 February 2003</p> <p>D Young &amp; Co (Agents for the Applicants)</p>	
8. Name and daytime telephone number of person to contact in the United Kingdom	Nigel Robinson	023 8071 9500

### Notes

If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.

Write your answers in capital letters using black ink or you may type them.

If there are more than three inventors, please write the names and addresses of the other inventors on the back of other Patents Form 7/77 and attach it to this form.

If an application does not declare any priority, or declares priority from an earlier UK application, you must send enough copies of this form so that the Patent Office can send one to each inventor who is not an agent.

If you have filled in the form you must remember to sign and date it.

# Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Surname: FLYNN

First Names: David Walter

1 Topcliffe Way

Cambridge

CB1 8SJ

United Kingdom

63526400

Patents ADP number (if you know it):

Surname: \_\_\_\_\_

First Names: \_\_\_\_\_

Patents ADP number (if you know it):

Surname: \_\_\_\_\_

First Names: \_\_\_\_\_

Patents ADP number (if you know it):

Reminder

Have you signed the form?

## DATA PROCESSING PERFORMANCE CONTROL

This invention relates to the field of data processing systems. More particularly, this invention relates to the field of the control of data processing performance, such as, for example, so as to reduce the energy consumed by a data processing system.

An important consideration in data processing systems is their energy consumption. Data processing systems which consume less energy allow longer battery life in mobile devices, tend to run cooler and more reliably, and require fewer special engineering considerations to deal with heat dissipation and the like. It is strongly desirable to reduce the energy consumption of data processing systems.

Balanced against a desire to reduce the energy consumption of data processing systems is a simultaneous desire to increase their performance level to deal with increasingly computationally intensive tasks. Such tasks often require highly intensive processing operations for short periods of time followed by relatively long idle times in which little computation is required.

In order to address the above two factors, it is known to produce data processing systems that are able to change their performance level so that high computational performance is provided in some configurations and low energy consumptions in other configurations. Known systems, such as the LongRun software produced by Transmeta, or the SpeedStep systems produced by Intel, allow a processor to be switched between such different configurations. In order to match the desired performance goals, a high computational performance configuration would be one with a relatively high operating voltage and a relatively high processor clock frequency. Conversely, a low energy consumption configuration has a relatively low operating voltage and a relatively low processor clock frequency.

As well as providing the performance and energy management capabilities described above, another important design characteristic is that hardware and software

designs should be re-useable in a relatively large number of different circumstances. If computer software, such as operating system software, has to be re-written for different hardware implementations, or the hardware designs significantly modified for different hardware implementations, then this is strongly disadvantageous.

5

According to one aspect the present invention provides apparatus for processing data, said apparatus comprising:

a processing circuit having a power supply configuration and driven by a clock signal, said processing circuit being operable:

10 (i) in a processing mode to perform data processing operations when said power supply configuration has a processing configuration and said clock signal is clocked; and

(ii) in a holding mode to hold state without performing data processing operations when said power supply has a holding configuration and said clock signal is stopped; and  
15

a power supply and clock signal control circuit responsive to a target rate signal indicative of a target rate of data processing operations to be performed by said processing circuit to modulate a target rate mode control signal to switch said processing circuit between said processing mode and said holding mode so as to achieve said target rate.  
20

The present technique provides a system which is able to support a range of performance levels by switching between a processing mode in which the processing circuit is clocked and a holding mode in which the processing circuit is not clocked.  
25 Modulating the switching between the two modes in accordance with a target rate signal indicative of a target rate of data processing system operations allows variable performance to be achieved. Furthermore, modulating between the holding mode and the processing mode allows a wide range of performance levels to be achieved whilst requiring only two modes to be designed into the hardware, validated, tested etc. The  
30 holding mode does not perform any processing since the clock has stopped and accordingly may simply be validated to the extent of showing that state is preserved in



that holding mode. The holding mode may be arranged with a power supply configuration that reduces energy consumption, such as reducing the rail voltage, using body biasing, etc. The providing of multiple performance levels without the need to provide multiple levels of voltage operation which are clocked also simplifies the integration of the processing circuit with further circuits since such a variety of operating voltages do not need to be accommodated and level shifting requirements can be reduced.

Preferred embodiments of the invention are such that the processing circuit generates a busy signal which indicates whether or not it is safe to switch the processing circuit from the processing mode to the holding mode. Thus, relatively simple power supply control circuits may be utilised with the processing circuit itself being able to override their operation so that they do not cause problems due to inappropriate power supply switching at sensitive points in the processing circuit operation, e.g. during pending data transfer with other circuit elements and the like.

The latency issues associated with operating the processing circuit in a holding mode may be addressed by providing a priority signal to override the target rate mode control signal such that the processing circuit can be switched back to the processing mode independently of the target rate or prevent it from switching into the holding mode independently of the target rate.

Particular examples of priority signals are interrupt signals and hardware real-time clock signals.

The present power control mechanism is advantageously simple to implement in that the target rate mode control signal, the busy signal and any priority signal may be logically combined with, for example, a simple OR gate in order to produce a signal for switching the processing circuit between the processing mode and the holding mode. This type of control also readily scales across multiple processing circuits which it may be desired to control in a co-ordinated manner.

As previously mentioned, the processing mode and the holding mode have different power supply configurations. These configurations could take a variety of different forms, the tendency being for the holding mode to be one in which energy consumption is lowered. Particularly preferred embodiments are ones in which the holding configuration corresponds to the power supply having a lower potential difference than the power supply in the processing configuration.

Given that the holding mode is one in which the processing circuit is not clocked, the potential difference in that mode may be reduced to a level which is insufficient to allow such clocking, but which produces enhanced energy saving.

Since in the holding mode the processing circuit is not clocked, simple signal clamping circuits can be provided around the processing circuit for use in the holding mode. This avoids the need to provide at least some of the more complex level shifter circuits that are required when multiple domains having different operating voltages interact with one another.

It will be appreciated that the processing circuit can take a wide variety of different forms, but the invention is particularly well suited to systems in which the processing circuit is a processor core.

In preferred embodiments of the invention active high signalling is used from the processing circuit to one or more further circuits. When the processing circuit is not being clocked and is in the holding mode, then these signals can be clamped down to ground in the same way as if the processing circuit was completely powered down.

Since the technique uses a clock signal which is modulated between being used and not used, the need to provide multiple clock signals having different frequencies is reduced. The clock frequency used may be a fixed frequency which is permanently available thus avoiding delays that can be introduced by having to start-up clock

generators to supply specific intermediate frequencies corresponding to different performance levels.

It will be appreciated that when switching power supply configurations, a finite amount of time is needed to move from the holding mode configuration to the processing mode configuration and it is unsafe to start clocking in the processing circuit until the power supply has the processing mode power supply configuration properly established. Accordingly, in preferred embodiments a power supply generator provides a ready signal to the clock generator to indicate that it is safe to start clocking the processing circuit.

Viewed from another aspect the present invention provides a method of processing data, said method comprising the steps of:

operating a processing circuit powered by a power supply signal and driven by a clock signal such that:

(i) in a processing mode said processing circuit performs data processing operations when said power supply signal has a processing configuration and said clock signal is clocked; and

(ii) in a holding mode said processing circuit holds state without performing data processing operations when said power supply has a holding configuration and said clock signal is stopped; and

in response to a target rate signal indicative of a target rate of data processing operations to be performed by said processing circuit using a power supply and clock signal control circuit to modulate a target rate mode control signal to switch said processing circuit between said processing mode and said holding mode so as to achieve said target rate.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 schematically illustrates a portion of a data processing system including a performance controller, a clock generator and a voltage controller;

Figure 2 is a flow diagram schematically illustrating the operation of an operating system computer program in setting a desired performance level;

5        Figure 3 schematically illustrates an example mapping between desired performance level and control signal value;

Figure 4 is a flow diagram schematically illustrating the control of a voltage controller;

10        Figure 5 is a flow diagram schematically illustrating the control of a clock generator;

Figure 6 is a diagram schematically illustrating another example of a data  
15        processing system utilising the current techniques;

Figure 7 is a diagram schematically illustrating a further example of a mapping between a desired performance level and a control signal value;

20        Figure 8 illustrates the modulation of power supply voltage between a holding mode level and a processing mode level;

Figure 9 schematically illustrates a circuit incorporating the technique of Figure 8;

25        Figure 10 is a flow diagram schematically illustrating the control of performance using a modulated voltage;

Figure 11 is a diagram schematically illustrating another data processing system using the technique of Figure 8; and

30

Figure 12 is a diagram illustrating various control signals used in embodiments such as those of Figures 8 to 11.

Figure 1 illustrates a portion of a data processing system including a performance  
5 controller 2, a clock generator 4 and a voltage controller 6. The circuits in Figure 1  
typically form part of a larger integrated circuit which includes a processor, such as an  
ARM processor produced by ARM Limited of Cambridge, England, as well as other  
circuit elements, possibly as part of a system-on-chip design. The circuit elements other  
than the performance controller 2, the clock generator 4 and the voltage controller 6 are  
10 omitted from Figure 1 for the sake of simplicity. The performance controller 2 receives a  
performance level request signal/value which is generated under program instruction  
control by a computer program, such as an operating computer program, executing upon  
the processor (not illustrated). This desired data processing performance level request  
may be written to a dedicated memory location within the memory address space for such  
15 a purpose, may be written to a control register, such as a control register within a  
configuration coprocessor, e.g. CP15 ARM architecture or stored in some other way. The  
performance controller 2 also incorporates a performance monitor, which may be one or  
more performance counters counting the passage of real time, clock signals, work  
performed or other performance monitoring parameters. When the performance  
20 controller 2 receives a data processing performance level request indicative of a change in  
the desired performance level, then it is used issue a request for the new target clock  
speed to the clock generator 4 and a request for a new target voltage to the voltage  
controller 6. It will be appreciated that once the program instruction has written its  
desired data processing performance level to the appropriate location it hands control of  
25 how that is put into effect to the hardware (performance controller 2). The performance  
controller 2 maps the desired data processing performance request to appropriate control  
signal values for the clock generator 4 and voltage controller 6 (the performance  
controller 2 includes a mapping circuit). The data processing performance request signal  
may be a Gray coded signal value or a simple linearly coded value. The mapping can be  
30 to a thermometer coded control signal value as this provides good resistance against  
sampling errors when sampling between clock domains which may be asynchronous.

Furthermore, this provides a type of fail-safe behaviour whereby sampling errors tend to produce the lowest stable synchronised value for use.

The control signal passed to the voltage controller 6 instructs the voltage controller 6 to adopt a new voltage output level. The voltage output levels that are supported may be configured by programming configuration parameter registers 8 within the voltage controller 6 at bootup or some other time. The voltage controller 6 takes a finite amount of time to ramp up or down to the new voltage level. In some embodiments, as it is changing to its new voltage level, the voltage controller 6 may pass through one or more intermediate levels which it would be capable of supporting an intermediate performance level pending reaching the final performance level (in other embodiments described later, a single operating frequency clock signal and a stopped clock may be used). The voltage controller 6 generates current operation signals indicative of the current voltage levels it can support and passes these back to the performance controller 2 where they may be acted upon to trigger use of associated clock frequencies as appropriate and available.

The performance controller 2 also converts the desired data processing performance level specified by program control into control signals that are passed to the clock generator 4. These control signals specify a target clock frequency. The clock generator 4 is supplied with a variety of clock signals from one or more phase lock loop circuits 10, 12. One of these phase lock loop circuits 10 is permanently enabled and serves to provide the minimum and maximum clock frequencies supportable as well as some intermediate frequencies. Another of the phase lock loop circuits 12 is selectively available and can be powered down to save energy when the intermediate clock frequencies which it generates are not required.

The clock generator 4 generates a performance controller clock signal which is supplied to a technology dependent slack detector 14 within the voltage controller 6. This arrangement can be used to provide an additional level of control within the voltage controller 6 such that the voltage it is generating can be adjusted to support the target

clock frequency with a reduced overshoot, i.e. the voltage level generated is just sufficient, with a small buffer, to support the target clock frequency. This fine level of control of the voltage output can be considered to be secondary to the gross performance level changes conducted in response to changes in desired data processing performance levels specified by program instructions. When a change to an increased performance level has been indicated, the voltage controller 6 will attempt to increase the voltage it is generating and when it is providing an increased voltage this is indicated back to the performance controller 2 which in turn can then control the CPU clock generator within the clock generator 4 to output a CPU clock signal cpuclock for supply to the processor having a new clock frequency sustainable with the new voltage, which may be an intermediate clock frequency on the way to the ultimate desired clock frequency. The clock generator 4 may not be capable of generating clock signals with the granularity that can be specified in the control signal values and accordingly passes back a quantised clock signal value corresponding to the actual clock frequency it is generating. Alternatively, this quantisation taking account of the actual capabilities of the clock generator 4 can take place within the mapping performed by the performance controller from the desired data processing performance request into the control signals. In another embodiment discussed later, the voltage controller has two possible voltage output levels, a high level for use in a processing mode and a low level for use in a holding mode when the clock is stopped.

Figure 2 schematically illustrates the processing operations which may be performed by an operating system computer program executing on a processor in accordance with one example of the technique. At step 16, the relevant processing thread waits until a determination is made of a need to change performance level. This need may be indicated by changes in external parameters, such as key presses by a user, or may be internally triggered through monitoring of the operational performance of the system using performance monitoring counters such as those previously discussed. When such a desired performance level change is detected, processing proceeds to step 18 at which the software performs a write to a memory mapped location dedicated to storing the desired data processing performance request level. The action of the

computer program code is to detect the requirement for a change in performance level and to write this requirement to a memory location. No control feedback need be provided to monitor that the desired change in performance actually takes place or how it takes place. There is an abstraction between the activity of the computer program in making this write and the underlying hardware mechanisms which act upon the request. This facilitates the use of substantially unaltered computer programs in a variety of environments taking advantage of whatever performance management mechanisms may or may not be provided within those environments.

Figure 3 schematically illustrates an example mapping between a 6-bit desired data processing performance request signal (which may optionally be Gray coded) and a corresponding thermometer coded control signal value. In this case whilst there are 33 possible performance levels, there are only 9 possible control signal values. Accordingly, there is a quantisation between the desired performance levels and control signal values.

This quantisation is arranged such that the control signal value corresponds to the maximum performance level within a range of performance levels which may be mapped to that control signal value. There is a monotonic increase in the desired performance signal and the performance level this is intended to specify. Thus, the desired performance level can be a binary fraction representing a percentage of the maximum performance level that may be achievable in the system. This is a convenient and flexible way to abstract the performance level request in a manner which it can be controlled by program instructions in a wide variety of different hardware environments and for a wide variety of different processing purposes.

Figure 4 schematically illustrates control of the voltage controller 6 in embodiments having multiple voltage levels corresponding to active processing modes in which the clock is running. At step 20 the voltage controller waits for receipt of a new control signal. When a new control signal is received, processing proceeds to step 22 at which a change in the voltage level supplied is initiated. This change may be an increase or a decrease. The voltage controller 6 has a finite slew rate at which it can change its output. Step 24 monitors until the next sustainable voltage level is reached during the



overall change which is occurring. When such a next level is reached, then step 26 is initiated and a new current voltage output signal is generated for supply back to the performance controller 2 to indicate the new voltage level which the voltage controller 6 is capable of supporting. This may be an intermediate voltage level on the way to the  
5 eventual target voltage level, or at the end of the slew is the final target voltage level itself. The performance controller 2 can act upon this current voltage output signal fed back to it to control the clock generator and possibly the performance monitoring circuits. Step 28 determines whether the final voltage has yet been reached. If the final voltage has not yet been reached, then processing is returned to step 24 and slewing of the voltage  
10 output continues towards its eventual target. In a system supporting only two voltage levels the system would simply wait for the final voltage level to be reached without the intermediate voltage levels.

It will be appreciated that Figure 4 assumes that the control signal does not  
15 change. In practice, the control signal may change before the final target voltage is reached. It may be that the need for a temporary change in performance level as determined by the program instructions within the operating system has gone away, such as an interrupt having been serviced or a panic mode signal having been de-asserted. In such circumstances, the control illustrated in Figure 4 is interrupted and processing  
20 returned to step 20 where action based upon the newly established control signal value is initiated. It will be appreciated that the control by the software is at least partially open loop in that it merely specifies which performance level it desires at a particular point in time but does not require monitoring of what performance is actually delivered or when the performance level is actually delivered.

25

As mentioned, a panic signal (priority signal or hardware override signal) may be supplied to the performance controller 2, to override any software control of the performance level and temporarily increase the performance level to a maximum level. Bypassing of the software control of performance level can facilitate more rapid and  
30 direct switching to maximum performance levels under purely hardware control, such as in response to specific high priority hardware interrupt signals. More than one such

“panic” signal may be provided, e.g. a “Low-Battery-Panic” signal might force performance to a known reduced level.

Figure 5 schematically illustrates the control of the clock generator 4. At step 30 the clock generator waits to receive a new control signal. When a new control signal is received, processing proceeds to step 32 at which a determination is made as to whether or not any additional phase lock loop circuit 12 needs to be powered up to service the ultimately required new clock frequency. If such additional phase lock loop circuits 12 are required, then processing proceeds to step 34 where they are started. Alternatively, processing proceeds directly to step 36.

At step 36 the clock generator determines whether a new clock signal closer to the requested performance level is available. This facilitates the adoption of intermediate performance levels pending the availability of the eventual target performance level. When such an intermediate clock frequency is identified, then processing proceeds to step 38. Step 38 determines whether or not the current operation signal value fed back from the voltage controller 6 indicates that a voltage is being generated that is capable of sustaining the new clock signal value. When such a voltage is available, then processing proceeds to step 40 at which the new clock signal value is adopted and generated by the CPU clock generator as signal cpuclock which is supplied to the processor core. Step 42 then outputs a new current clock value back to the performance controller 2 where it may be acted upon by the performance monitoring hardware to assess the forward progress through the code. Step 44 determines whether or not the switch to the new clock frequency has been the switch to the final clock frequency which was specified by the program instruction generated desired data processing performance request. If the final target clock frequency has not been reached, then processing returns to step 36, otherwise the control terminates, (effectively returns to step 30).

As for Figure 4, Figure 5 also assumes that the desired data processing performance level specified by the program instructions does not change. If this does change, then a new mapped control signal value will be generated which interrupts the

processing illustrated in Figure 5 and returns the processing to step 30 whereupon the new control signal value is acted upon.

5 The adoption of intermediate clock frequency values whilst changing between an initial and a final clock frequency value allows the best forward progress through the code to be achieved for the particular state of the circuits concerned. The circuits do not stay operating at the initial clock frequency until the eventual target clock frequency becomes available, but instead ramp up or down through a sequence of clock frequencies as each becomes available during the performance slew. The adoption of a new clock  
10 frequency can be considered to be controlled by a logical AND of a signal indicating that the frequency is closer to the target frequency than the current frequency, a signal indicating the availability of that frequency from a clock source together with a signal indicating that the voltage controller is capable of producing a power signal having a voltage sufficient to sustain operation at that new clock frequency. Alternatively, in other  
15 embodiments having only two performance levels (MAX/IDLE), the system would wait for the final voltage before making the switch.

Figure 6 is a diagram schematically illustrating a data processing system utilising the current techniques. Like elements to those illustrated in Figure 1 are given like  
20 reference numerals. Figure 6 additionally illustrates the processor 46 which executes the program instructions, which may be held within a tightly coupled memory system 48 or some other memory. The different voltage domains concerned necessitate level shifters to be provided at various interfaces in the circuit as illustrated.

25 Figure 7 illustrates another example mapping between desired data processing performance request level and thermometer coded control signal value. In this case a 32-bit thermometer coded control signal value is used yielding the possibility of a finer grained control of performance. It may be that the further circuits which respond to these 32-bit control signal values are in fact only capable of providing more coarsely grained  
30 control and so will effectively internally quantise the control signal values concerned. The thermometer coded control signal values provide a particularly convenient way of

combining control signal values from different sources, such as from different processors on a multiprocessor system, whereby the overall performance level, which may be controllable only on a chip-wide basis, can be properly selected. A maximum control signal value can be determined by a logical OR of the control signal values, a minimum control signal value may be determined by a logical AND of the control signal value and equivalence may be determined by the XOR of the control signal values. The maximum function may be useful in determining the maximum requested clock frequency, the minimum function may be useful in indicating the minimum sustainable voltage and the equivalents function may be useful in determining a match between requirements of different elements.

Figure 8 illustrates another performance control technique. In this example the supply voltage to a processing circuit is shown as being modulated (in this example pulse width modulated) between a holding mode voltage level HM and a processing mode voltage level PM. When in the holding mode the processing circuit is not clocked and makes no progress through the code being executed. When in the processing mode, the processing circuit is clocked at its full clock signal rate and makes progress through the code being executed. The first portion of Figure 8 illustrates the situation in which the processing circuit is in the processing mode for 50% of the time and accordingly can be considered effectively to be operating at a clock frequency of half of the supplied clock frequency. The power supply configuration, in this case the supply rail voltage (although body biasing or other techniques may be employed), is such that in the holding mode the energy consumption of the processing circuit is reduced. Thus, the processing circuit consumes less energy operating as shown since it spends half of its time in the lower energy consumption holding mode compared with being permanently in the processing mode.

In the middle portion of Figure 8 a different modulation duty cycle ratio of 33% is used and the effective clock frequency is thus  $1/3$  of its maximum rate. In the final portion of Figure 8, the system is seen to be operating 100% of its time in the processing mode and is thus effectively operating at the full fixed clock frequency rate.

Figure 9 schematically illustrates a data processing system 50 comprising a processor core 52, a tightly coupled memory 54 and a DSP circuit 56 all linked by a bus 58. The processor core 52 is subject to the above described performance control technique of Figure 8 and is switched between a processing mode and a holding mode. A voltage and clock controller 60 receives a target performance level request from the processor core 52, possibly as generated by an operating system or other code executing on the processor core 52, and uses this to generate a pulse width modulated signal PWM selected to give an appropriate duty ratio at the fixed clock frequency to achieve the desired performance level. An OR gate 62 ORs this PWM signal with a busy signal generated by the processor core 52, an interrupt signal irq and a real-time clock request signal generated by a real-time clock circuit 64. Any of the busy signal, the interrupt signal irq and the real-time clock request signal can override the PWM signal and force the system into the processing mode when the PWM signal would otherwise place it in the holding mode.

The output of the OR gate 62 is supplied to a clock generator 66 and a voltage generator 68. When the output of the OR gate 62 indicates that the processing mode is required, then the clock generator 66 generates its clock signal clk which is supplied to the processor core 52 once the clock generator circuit 66 has received a ready signal from the voltage generator 68 indicating that the voltage generator 68 has successfully changed the power supply configuration of the processor core 52 into the processing mode configuration and this is now sufficiently stable to support clocking of the processor circuit 52. The processor core 52 generates a busy signal when it is not safe to switch the processor core 52 from the processing mode to the holding mode, e.g. when there are pending data transfers to further circuits, such as the tightly coupled memory 54 or the DSP circuit 56 via the bus 58. The processor core 52 uses active high signalling with the further circuit elements such as the tightly coupled memory 54 and the DSP circuit 56 such that clamping circuits 70 can clamp these to a ground level when the processor core 52 is placed into the holding mode or is completely powered down.

Figure 10 schematically illustrates a flow diagram of how the performance control may be achieved by the voltage and clock controller 60. At step 72 a new desired performance level is indicated to the voltage and clock controller 60 by the processor core 52. At step 74 this desired performance level is converted into an appropriate pulse width modulation duty cycle in dependence upon a lookup in a mapping table, hardwired logic or by means. It will be appreciated that this example uses pulse width modulation, but other modulation schemes are also possible such as a scrambled sequence PWM scheme or other schemes.

Figure 11 illustrates a further circuit using the technique of Figure 8. This circuit is similar to that of Figure 6 noting that at least some of the level shifting circuits have been replaced by clamp circuits and switched power domains are used rather than dynamic voltage scale domains.

Figure 12 illustrates the PWMDVS signal produced by the voltage and clock controller 60 to command a desired performance level. The IEC REQ signal indicates successive signals being sent to a intelligent energy controller to trigger sleep and wake actions as the system moves into and out of the holding mode. The IEC PANIC signal is a priority signal for overriding the PWMDVS signal. The CPUACTIVE signal is the busy signal indicating that it is not yet safe to stop the clock to the CPU.

The VDDREQ is the output of the OR gate 62. The VDD CPU is the signal output from the voltage generator 68 and shows the finite slew rate. VREADY is the signal from the voltage generator 68 indicating to the clock generator that the clock switch can be made. It should be noted that a switch to the processing mode is not made until the slew is complete , but switching to the holding mode can take place sooner.

**CLAIMS**

1. Apparatus for processing data, said apparatus comprising:  
a processing circuit having a power supply configuration and driven by a clock  
5 signal, said processing circuit being operable:  
(i) in a processing mode to perform data processing operations when said power  
supply configuration has a processing configuration and said clock signal is  
clocked; and  
(ii) in a holding mode to hold state without performing data processing operations  
10 when said power supply has a holding configuration and said clock signal is  
stopped; and  
a power supply and clock signal control circuit responsive to a target rate signal  
indicative of a target rate of data processing operations to be performed by said  
processing circuit to modulate a target rate mode control signal to switch said processing  
15 circuit between said processing mode and said holding mode so as to achieve said target  
rate.
2. Apparatus as claimed in claim 1, comprising one or more further circuits coupled  
to said processing circuit.  
20
3. Apparatus as claimed in any one of claims 1 and 2, wherein said processing  
circuit is operable to generate a busy signal indicative of whether said processing circuit  
can be switched from said processing mode to said holding mode, said power supply and  
clock signal control circuit being responsive to said busy signal to override said target  
25 rate mode control signal to prevent a switch of said processing circuit from said  
processing mode to said holding mode independent of said target rate.
4. Apparatus as claimed in claim 2 and claim 3, wherein said processing circuit is  
operable to assert said busy signal when a signal transfer is pending between said  
30 processing circuit and at least one of said one or more further circuits.

5. Apparatus as claimed in any one of the preceding claims, wherein said power supply and clock signal control circuit is responsive to a priority signal to override said target rate mode control signal to:

(i) switch said processing circuit from said holding mode to said processing mode independent of said target rate; and

(ii) to prevent a switch of said processing circuit from said processing mode to said holding mode independent of said target rate.

6. Apparatus as claimed in claim 5, wherein said priority signal is one of:

(i) an interrupt signal; and

(ii) a hardware real-time timer signal.

7. Apparatus as claimed in claim 1, claim 3 and claim 6, wherein said target rate mode control signal, said busy signal and said priority signal are logically combined to generate a signal operable to switch said processing circuit between said processing mode and said holding mode.

8. Apparatus as claimed in any one of the preceding claims, wherein said holding configuration corresponds to a power supply to said processing circuit having a potential difference lower than said potential difference corresponding said processing configuration.

9. Apparatus as claimed in claim 8, wherein said processing circuit has a lower power consumption configuration when in said holding mode than when in said processing mode.

10. Apparatus as claimed in any one of claims 8 and 9, wherein in said holding mode said potential difference of said power supply to said processing circuit is insufficient to allow said processing circuit to be clocked.



11. Apparatus as claimed in claim 2, wherein one or more signal clamping circuits are provided between said processing circuit and said one or more further circuits.

12. Apparatus as claimed in any one of the preceding claims, wherein said processing  
5 circuit is a processor core.

13. Apparatus as claimed in claim 2, wherein active high signalling is used from said processing circuit and said one or more further circuits.

10 14. Apparatus as claimed in any one of the preceding claims, comprising a clock generator operable to generate a clock source signal having a fixed frequency which is selectively supplied to said processing circuit in dependence upon whether said processing circuit is in said processing mode or said holding mode.

15 15. Apparatus as claimed in claim 14, comprising a power supply generator, wherein when switching from said holding mode to said processing mode, said power supply generator sends a ready signal to said clock generator to indicate that said power supply configuration has reached said processing configuration such that said clock signal may be started.

20

16. A method of processing data, said method comprising the steps of:  
operating a processing circuit powered by a power supply signal and driven by a clock signal such that:

25

(i) in a processing mode said processing circuit performs data processing operations when said power supply signal has a processing configuration and said clock signal is clocked; and

(ii) in a holding mode said processing circuit holds state without performing data processing operations when said power supply has a holding configuration and said clock signal is stopped; and

30

in response to a target rate signal indicative of a target rate of data processing operations to be performed by said processing circuit using a power supply and clock

signal control circuit to modulate a target rate mode control signal to switch said processing circuit between said processing mode and said holding mode so as to achieve said target rate.

- 5 17. A method as claimed in claim 16, wherein one or more further circuits are coupled to said processing circuit.

18. A method as claimed in any one of claims 16 and 17, wherein said processing circuit is operable to generate a busy signal indicative of whether said processing circuit  
10 can be switched from said processing mode to said holding mode, said power supply and clock signal control circuit being responsive to said busy signal to override said target rate mode control signal to prevent a switch of said processing circuit from said processing mode to said holding mode independent of said target rate.

- 15 19. A method as claimed in claim 17 and claim 18, wherein said processing circuit is operable to assert said busy signal when a signal transfer is pending between said processing circuit and at least one of said one or more further circuits.

20. A method as claimed in any one of claims 16 to 19, wherein said power supply  
20 and clock signal control circuit is responsive to a priority signal to override said target rate mode control signal to:

(i) switch said processing circuit from said holding mode to said processing mode independent of said target rate; and

- (ii) to prevent a switch of said processing circuit from said processing mode to  
25 said holding mode independent of said target rate.

21. A method as claimed in claim 20, wherein said priority signal is one of:

(i) an interrupt signal; and

(ii) a hardware real-time timer signal.

22. A method as claimed in claim 16, claim 18 and claim 20, wherein said target rate mode control signal, said busy signal and said priority signal are logically combined to generate a signal operable to switch said processing circuit between said processing mode and said holding mode.

5

23. A method as claimed in any one of claims 16 to 22, wherein said holding configuration corresponds to a power supply to said processing circuit having a potential difference lower than said potential difference corresponding said processing configuration.

10

24. A method as claimed in claim 23, wherein said processing circuit has a lower power consumption when in said holding mode than when in said processing mode.

25. A method as claimed in any one of claims 23 and 24, wherein in said holding mode said potential difference of said power supply to said processing circuit is insufficient to allow said processing circuit to be clocked.

15

26. A method as claimed in claim 17, wherein one or more signal clamping circuits are provided between said processing circuit and said one or more further circuits.

20

27. A method as claimed in any one of claims 16 to 26, wherein said processing circuit is a processor core.

28. A method as claimed in claim 17, wherein active high signalling is used from said processing circuit and said one or more further circuits.

25

29. A method as claimed in any one of claims 16 to 28, wherein a clock generator is operable to generate a clock source signal having a fixed frequency which is selectively supplied to said processing circuit in dependence upon whether said processing circuit is in said processing mode or said holding mode.

30

DYC Ref: P15271GBP  
ARM Ref: P289

30. Apparatus as claimed in claim 29, wherein when switching from said holding mode to said processing mode, a power supply generator sends a ready signal to said clock generator to indicate that said power supply configuration has reached said processing configuration such that said clock signal may be started.

**ABSTRACT**

**DATA PROCESSING PERFORMANCE CONTROL**

Performance control of a processor core 52 is achieved by modulating between a  
5 processing mode power supply configuration which the processor core 52 is clocked and  
a holding mode power supply configuration which the processor core 52 is not clocked.  
By modulating between these two power supply configuration modes, a target  
performance level may be achieved and energy consumption whilst in the holding mode  
can be reduced.

10

[Figure 8]

1/12

Spec

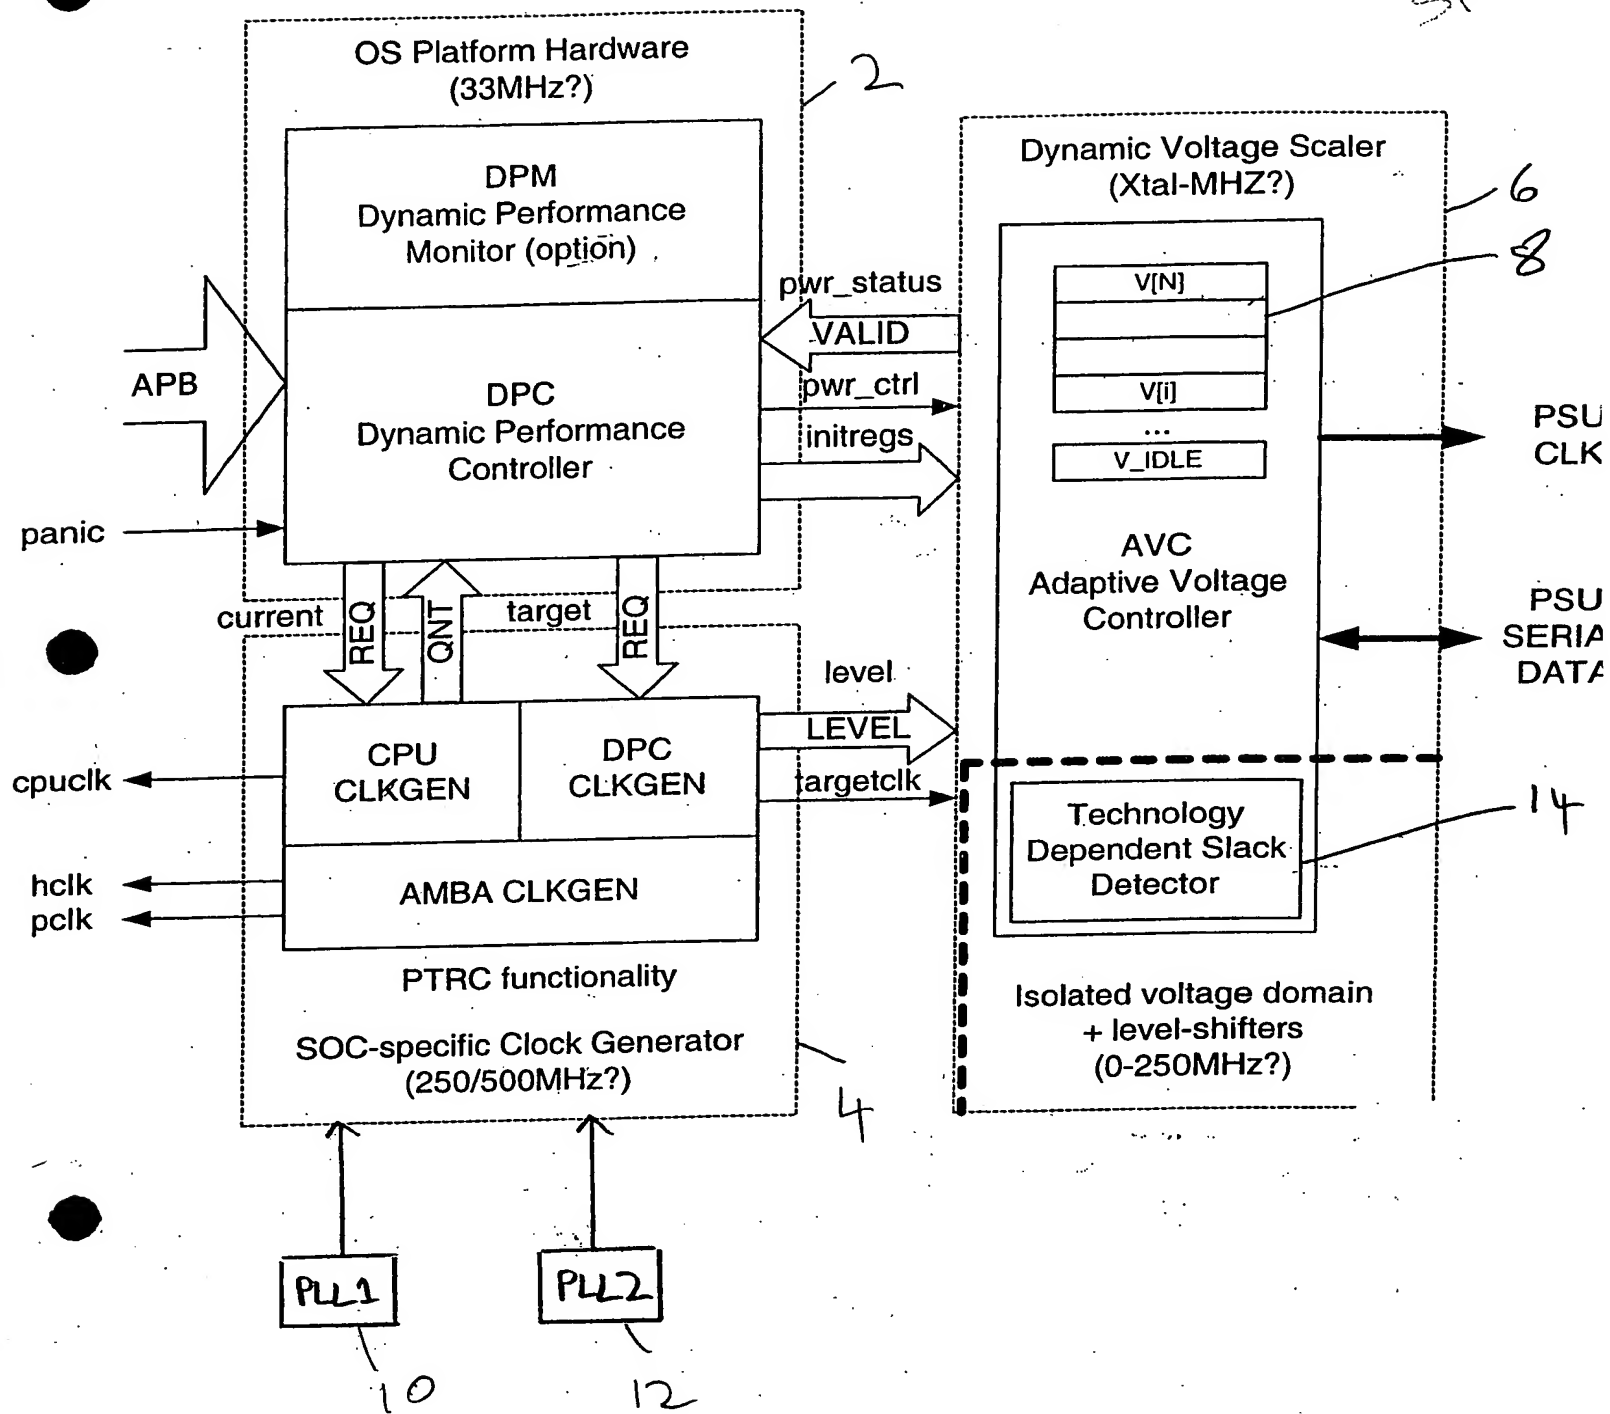


Fig. 1

2/12

Spec

OS  
Thread

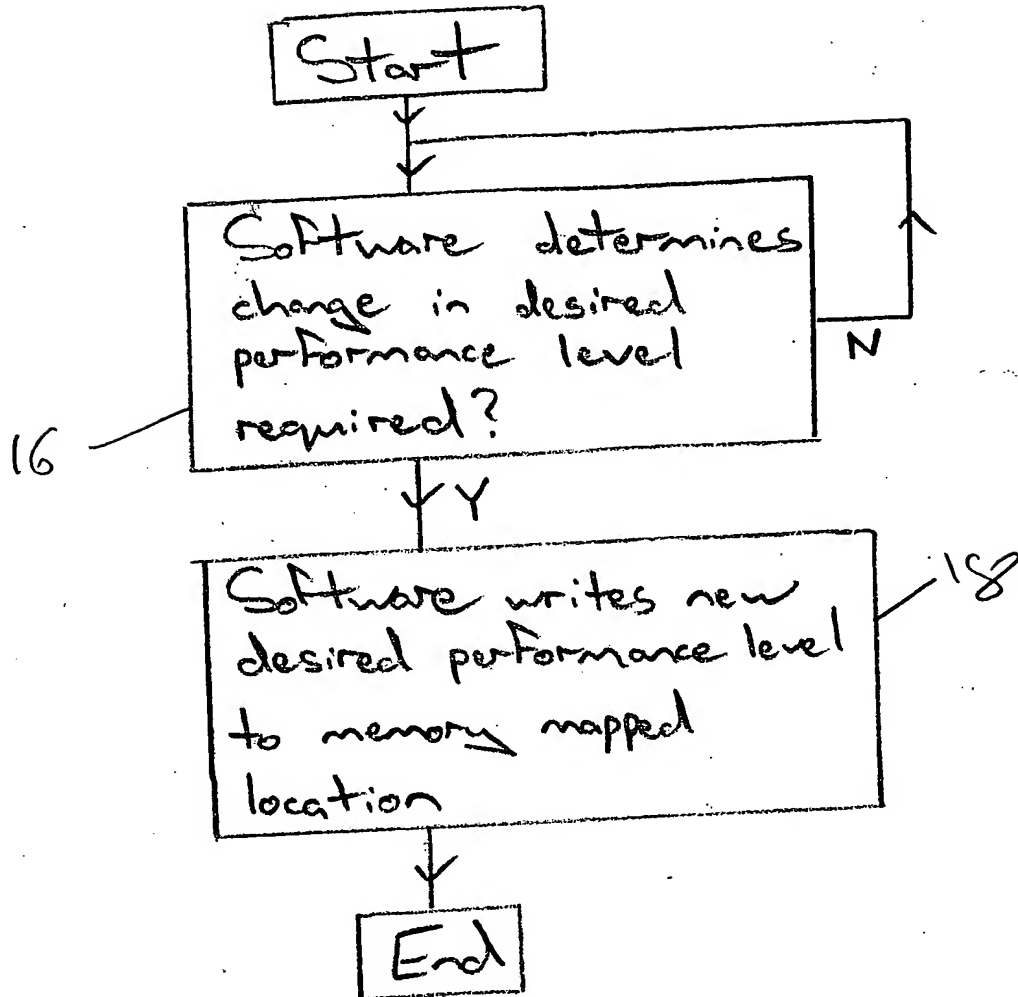


Fig. 2

3/12

Desired Performance  
6-bit

Control Signal <sup>space</sup>  
Value

0  
1 - 4  
5 - 8  
9 - 12  
13 - 16  
17 - 20  
21 - 24  
25 - 28  
29 - 32

00000000 Idle  
00000001  
00000011  
00000111  
00001111  
00011111  
01111111  
11111111


Example Mapping

Fig. 3



4/12

50-52

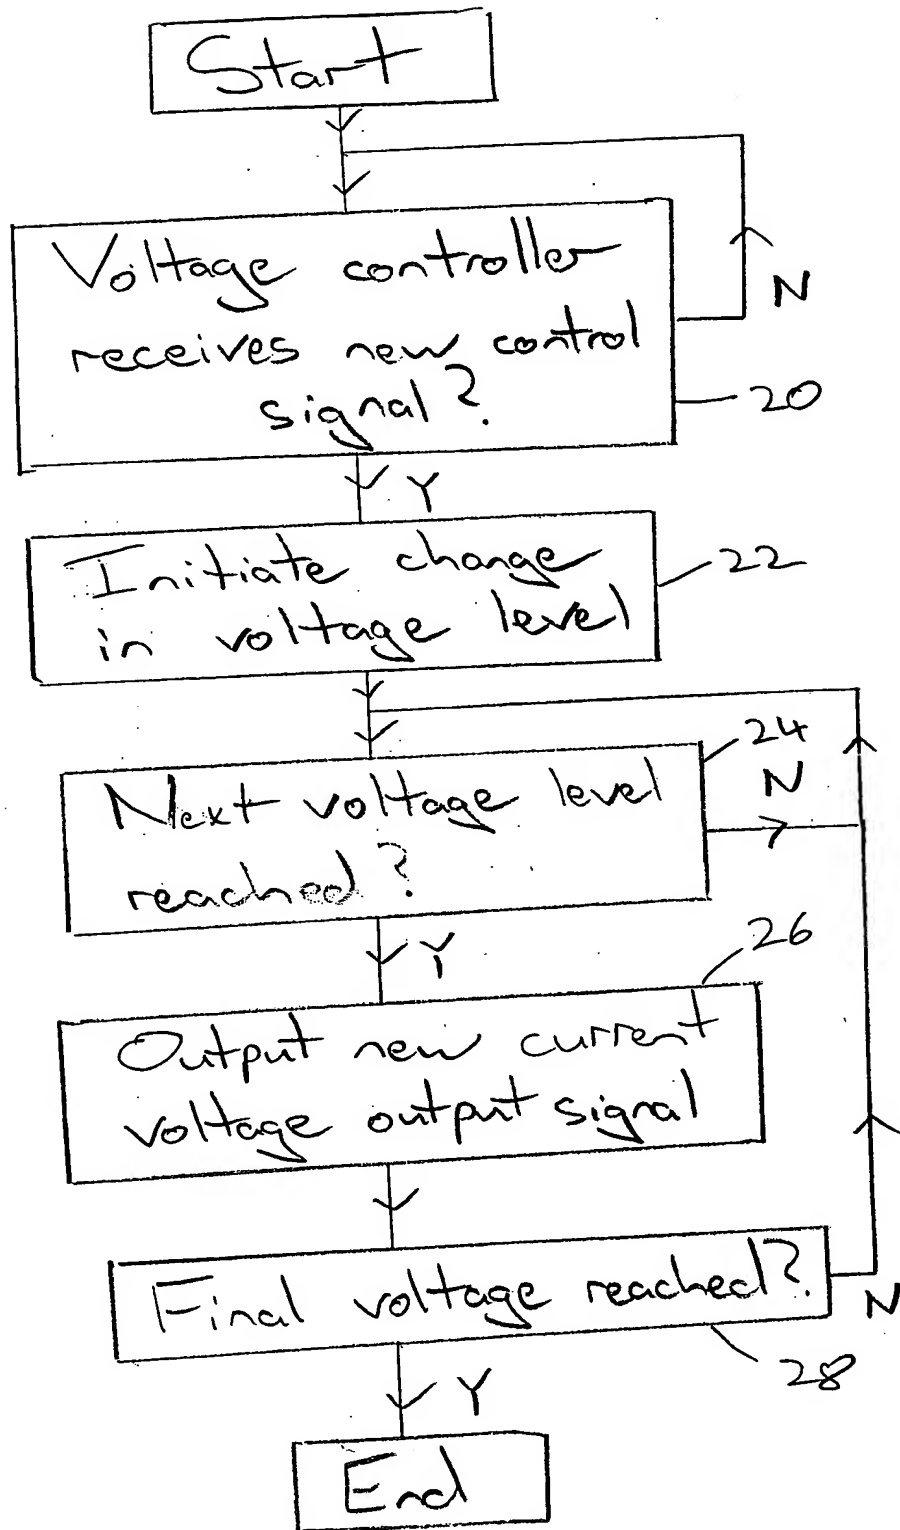


Voltage Controller

Fig. 4

5/12

Spore

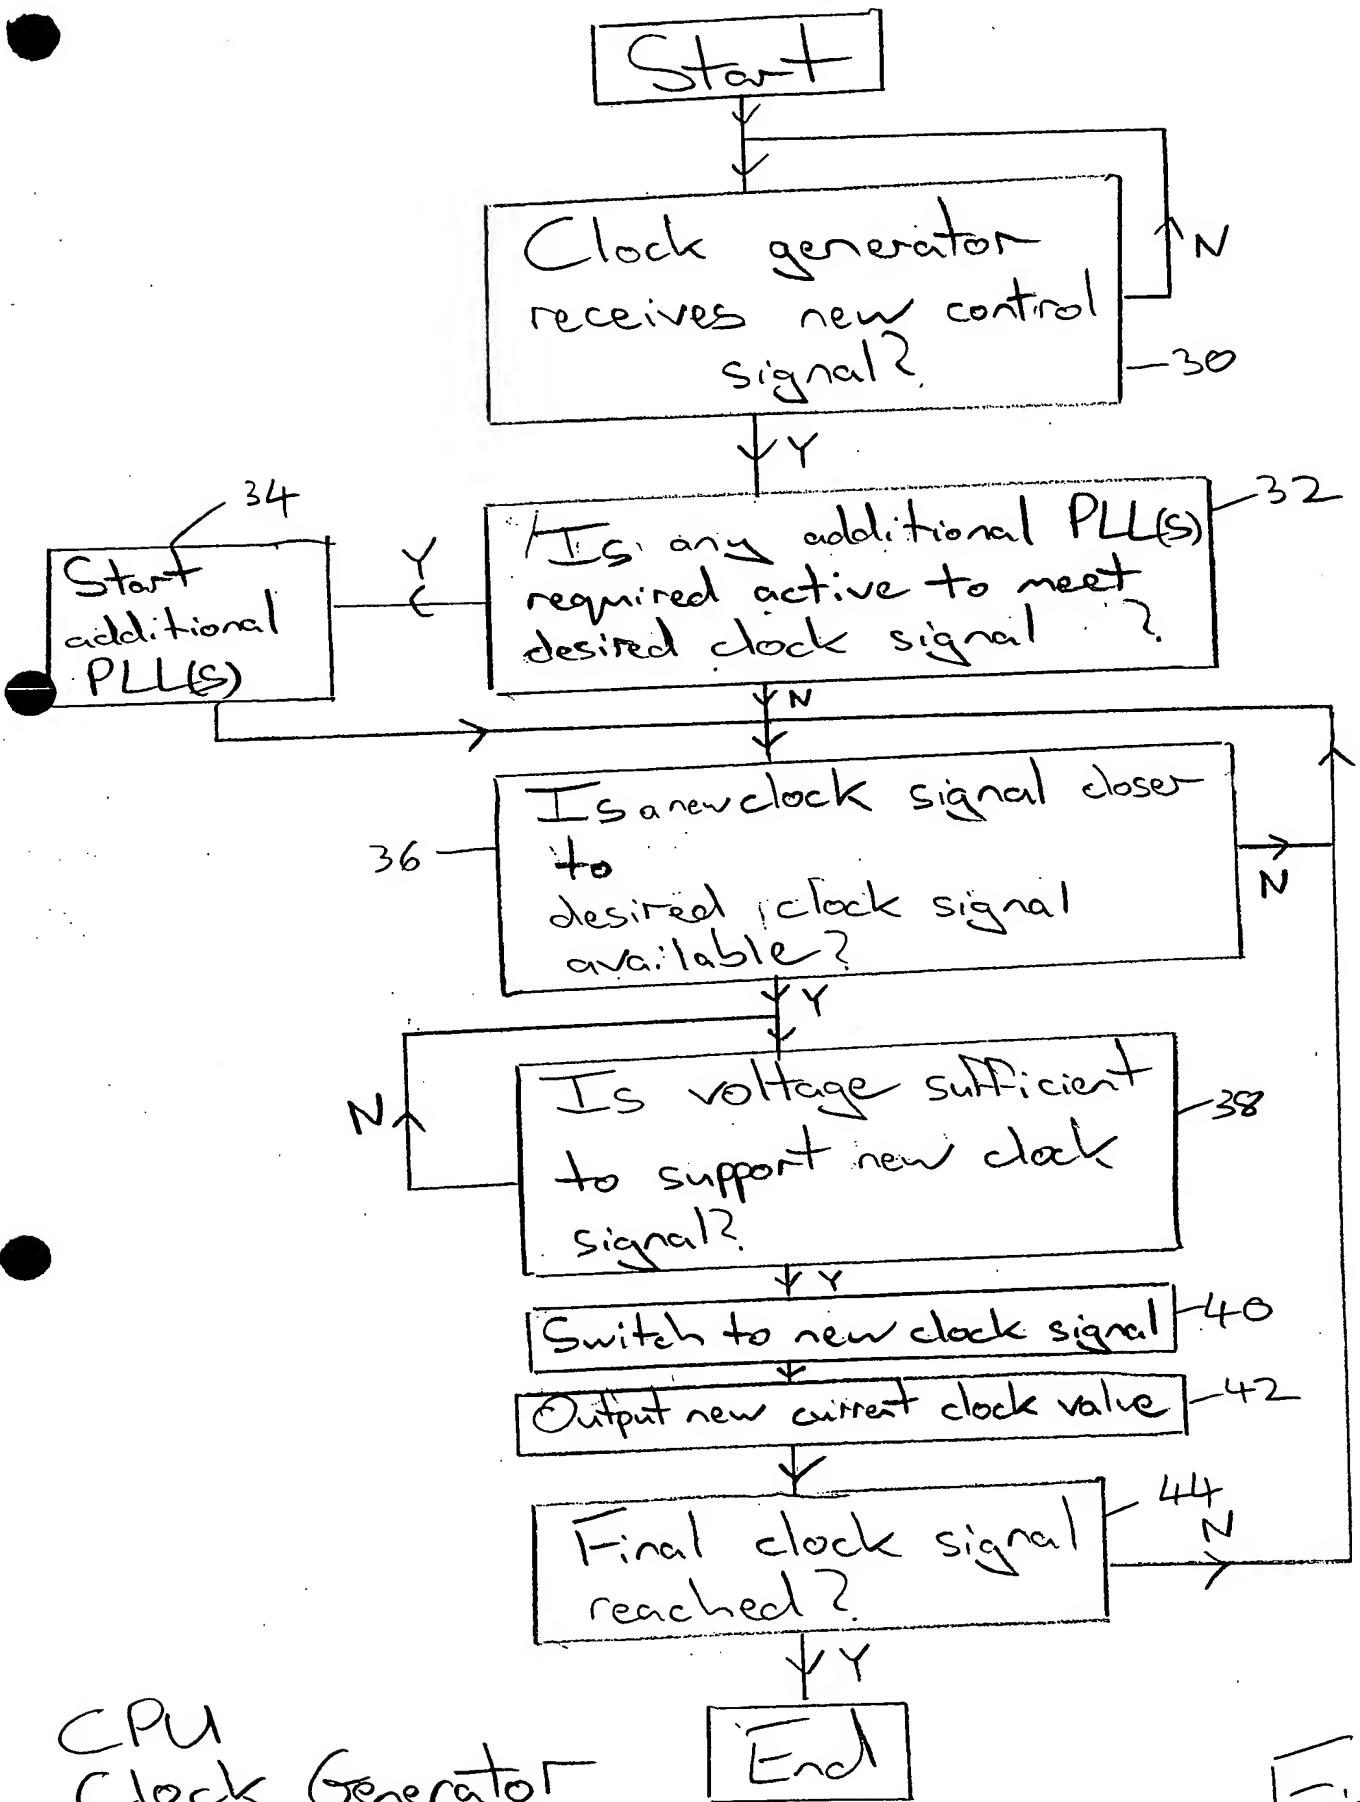


CPU Clock Generator

Fig 5

6/12

Spore

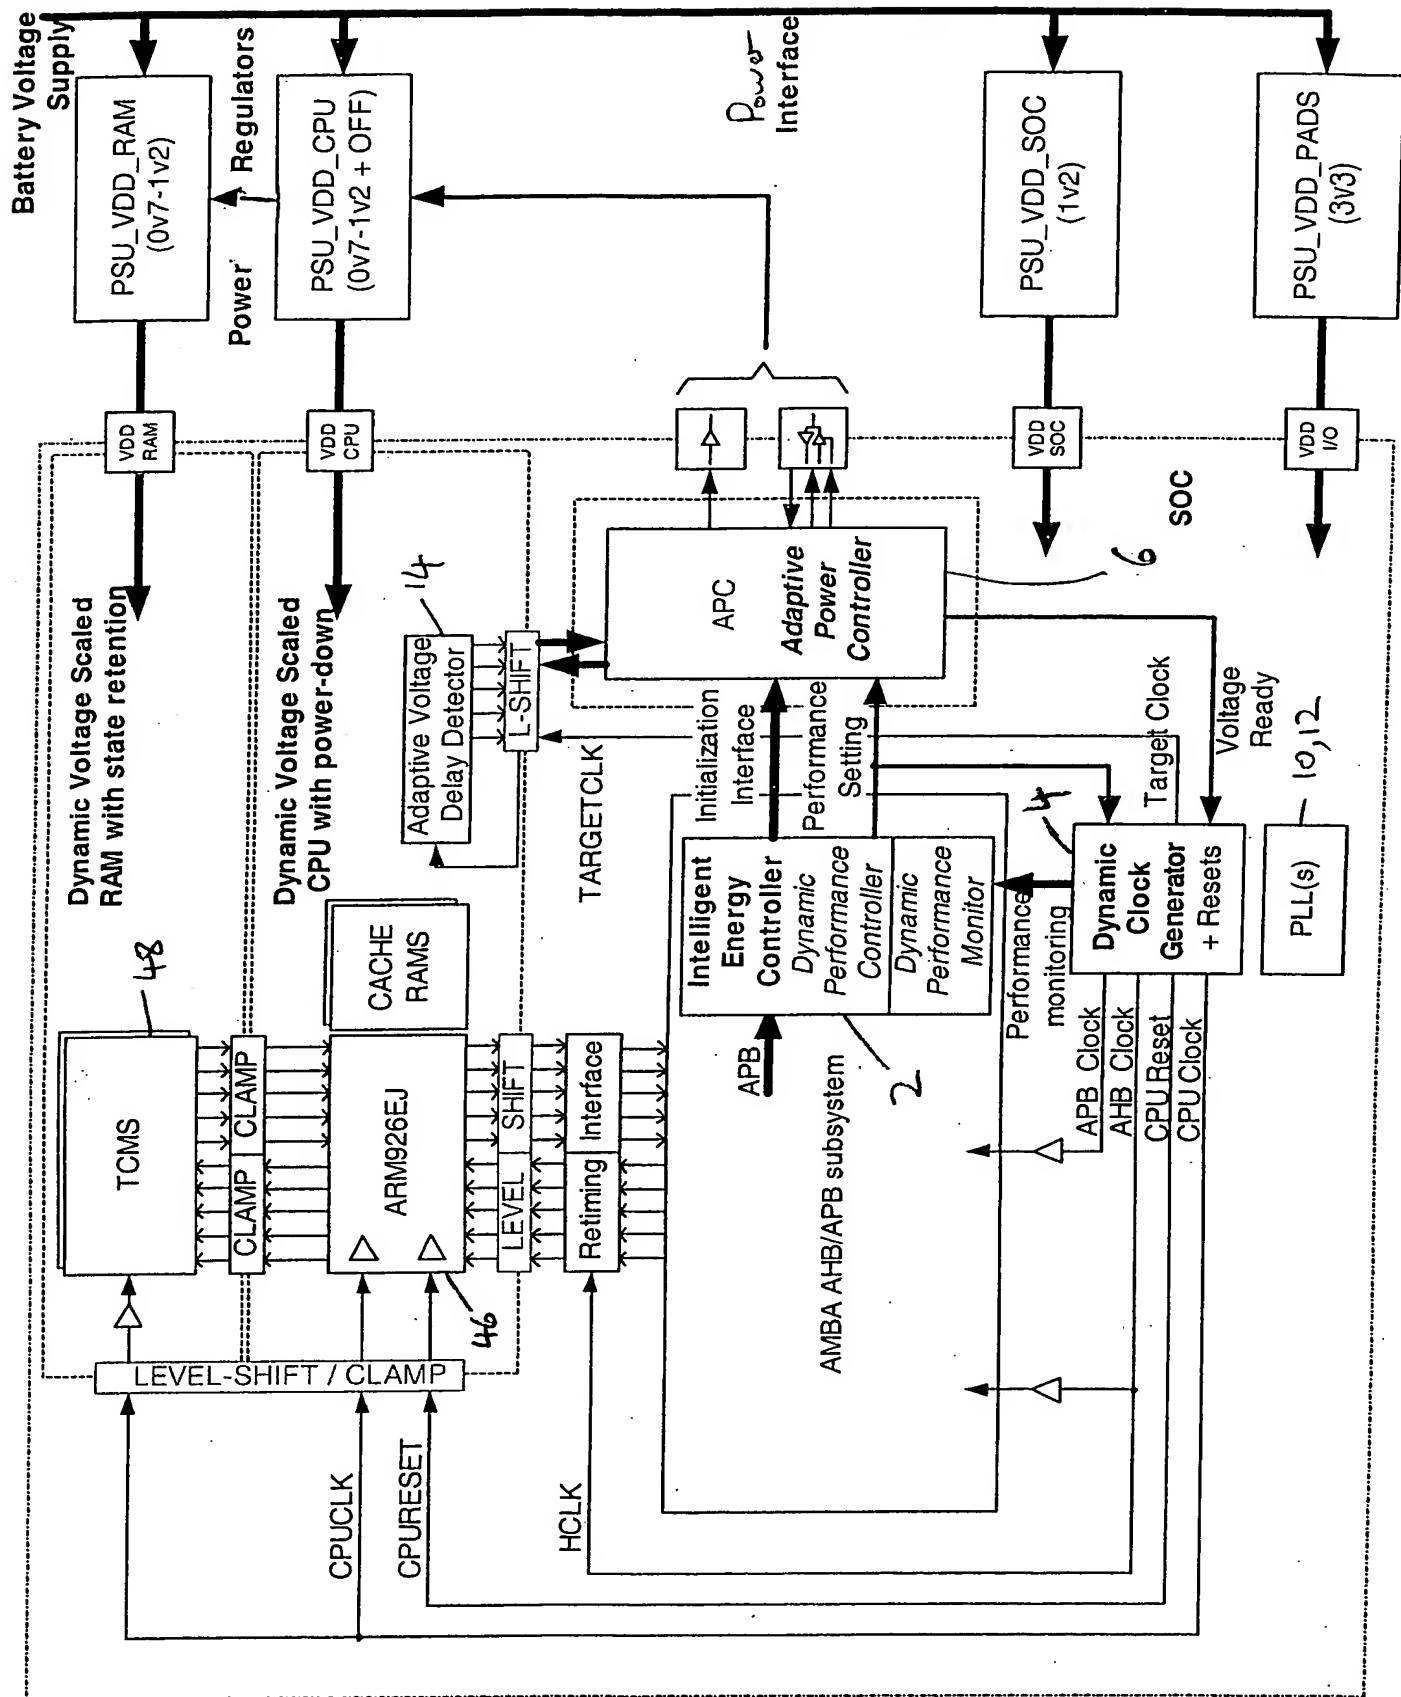

7/12

Square

Perf/32	Binary	Fractional	%	Coding	Note
32	1.00000	1.00000	100.0%	11111111111111111111111111111111	MAX
31	0.11111	0.96875	96.9%	01111111111111111111111111111111	
30	0.11110	0.93750	93.8%	00111111111111111111111111111111	
29	0.11101	0.90625	90.6%	00011111111111111111111111111111	
28	0.11100	0.87500	87.5%	00001111111111111111111111111111	
27	0.11011	0.84375	84.4%	00000111111111111111111111111111	
26	0.11010	0.81250	81.3%	00000011111111111111111111111111	
25	0.11001	0.78125	78.1%	00000001111111111111111111111111	
24	0.11000	0.75000	75.0%	00000000111111111111111111111111	
23	0.10111	0.71875	71.9%	00000000011111111111111111111111	
22	0.10110	0.68750	68.8%	00000000001111111111111111111111	
21	0.10101	0.65625	65.6%	00000000000111111111111111111111	
20	0.10100	0.62500	62.5%	00000000000011111111111111111111	
19	0.10011	0.59375	59.4%	00000000000001111111111111111111	
18	0.10010	0.56250	56.3%	00000000000000111111111111111111	
17	0.10001	0.53125	53.1%	00000000000000011111111111111111	
16	0.10000	0.50000	50.0%	00000000000000001111111111111111	
15	0.01111	0.46875	46.9%	00000000000000001111111111111111	
14	0.01110	0.43750	43.8%	00000000000000000111111111111111	
13	0.01101	0.40625	40.6%	00000000000000000011111111111111	
12	0.01100	0.37500	37.5%	00000000000000000001111111111111	
11	0.01011	0.34375	34.4%	00000000000000000000111111111111	
10	0.01010	0.31250	31.3%	00000000000000000000011111111111	
9	0.01001	0.28125	28.1%	00000000000000000000001111111111	
8	0.01000	0.25000	25.0%	00000000000000000000000111111111	
7	0.00111	0.21875	21.9%	00000000000000000000000011111111	
6	0.00110	0.18750	18.8%	00000000000000000000000001111111	
5	0.00101	0.15625	15.6%	00000000000000000000000000111111	
4	0.00100	0.12500	12.5%	00000000000000000000000000011111	
3	0.00011	0.09375	9.4%	00000000000000000000000000001111	
2	0.00010	0.06250	6.3%	00000000000000000000000000000111	
1	0.00001	0.03125	3.1%	00000000000000000000000000000001	
0	0.00000	0.00000	0.0%	00000000000000000000000000000000	IDLE

Figure 7.

8/12

Span

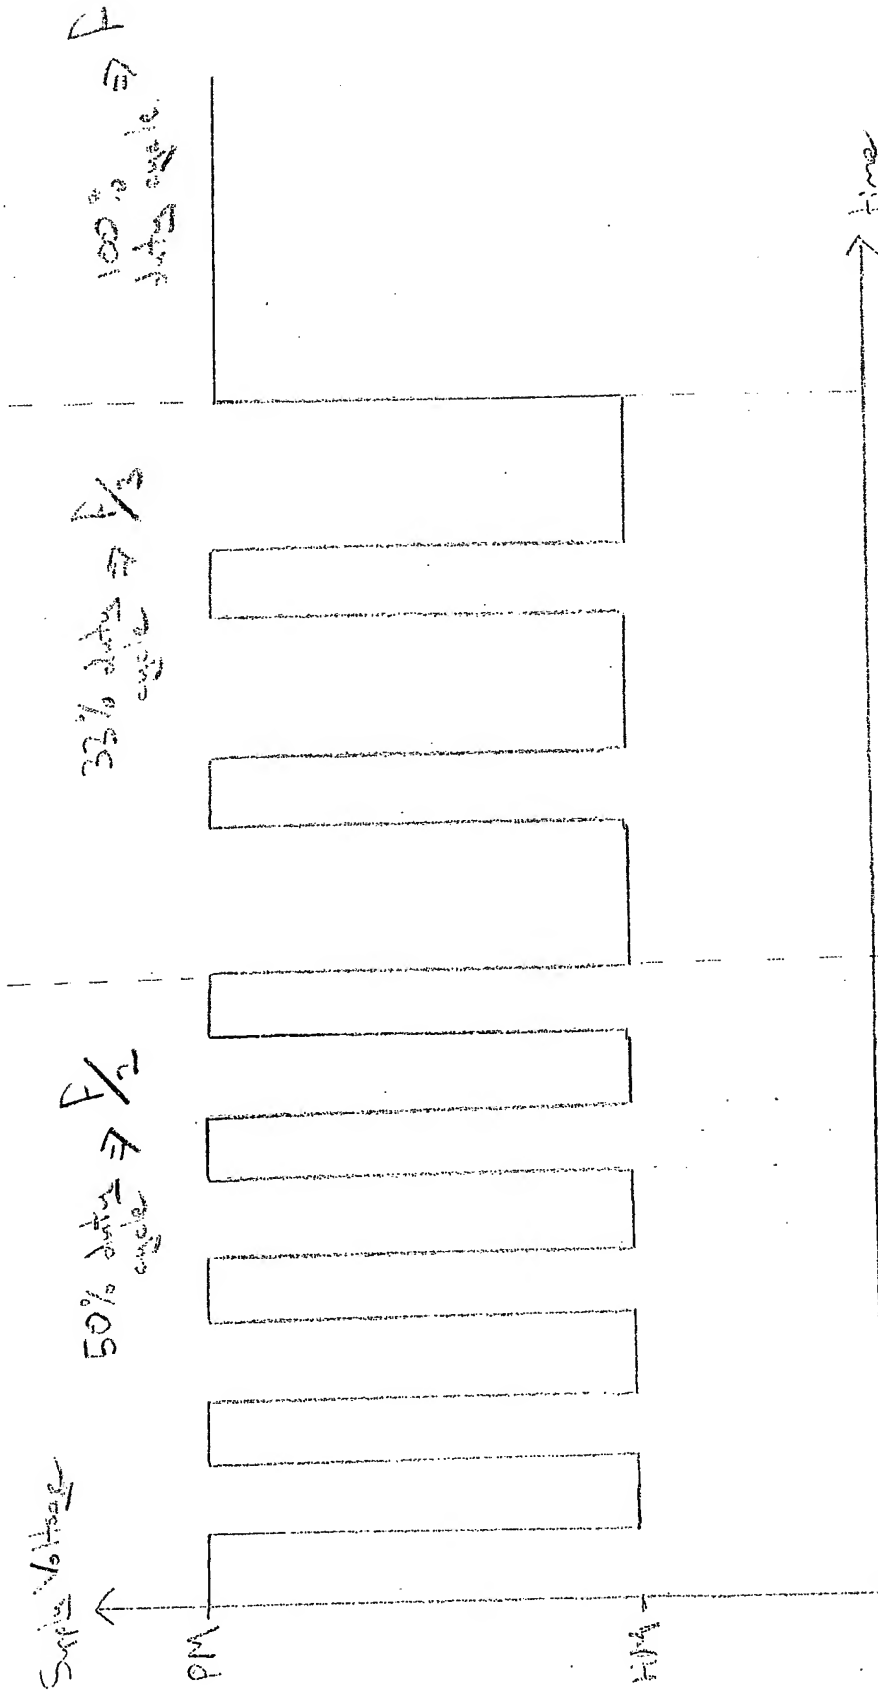


Fig 8

9/12

Spave

50

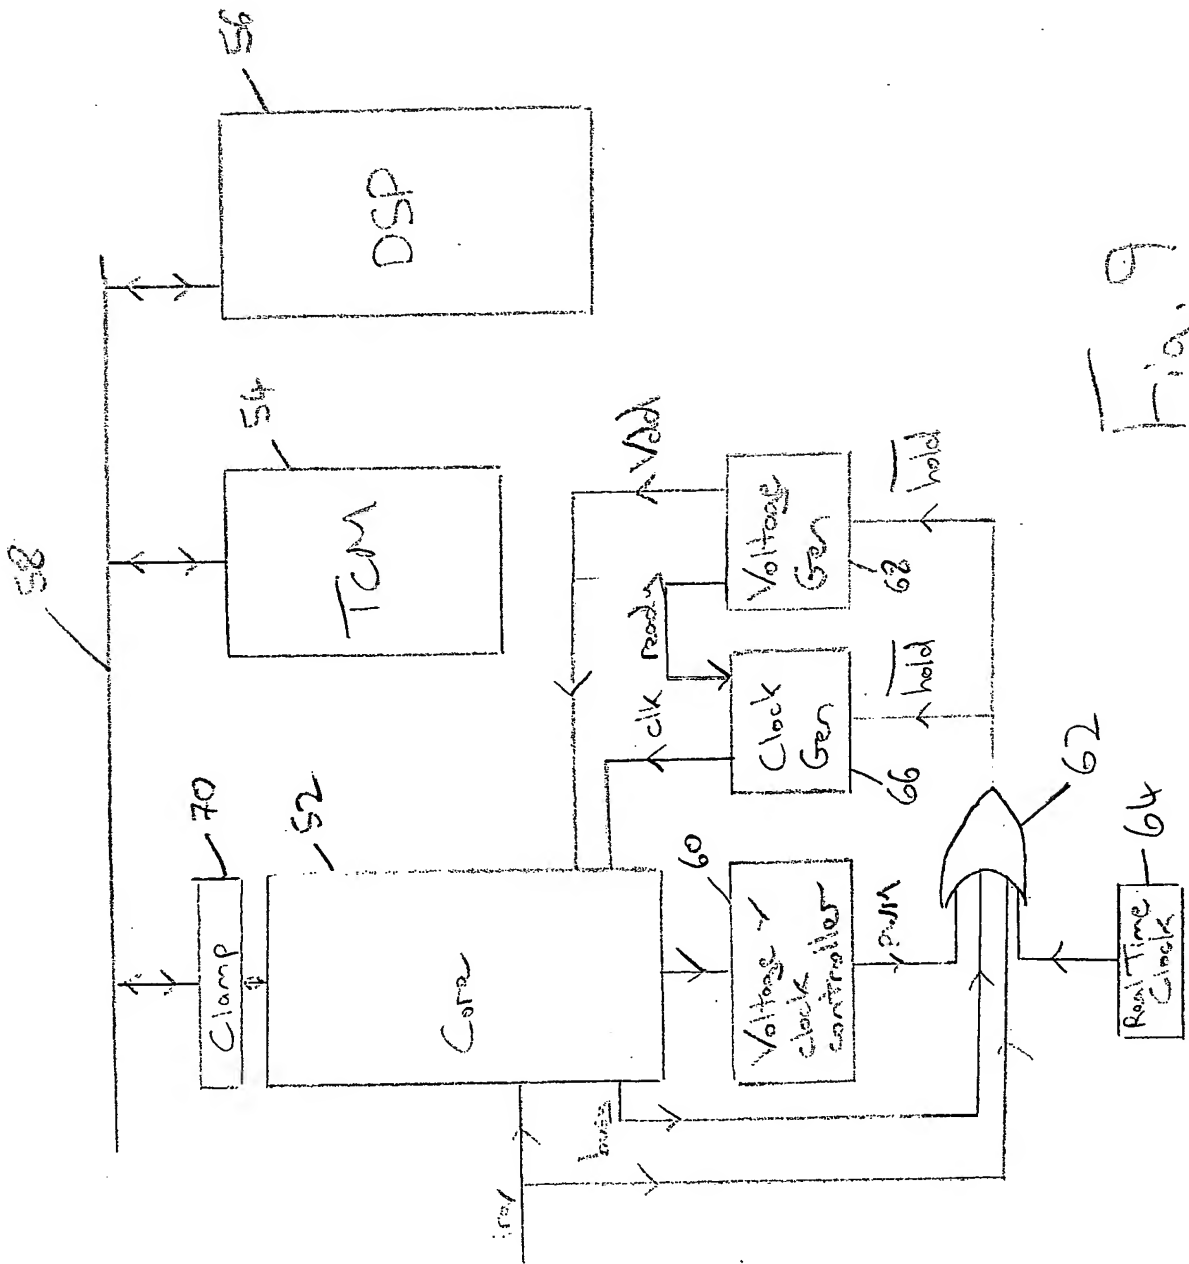


Fig. 9

10/12

Spencer


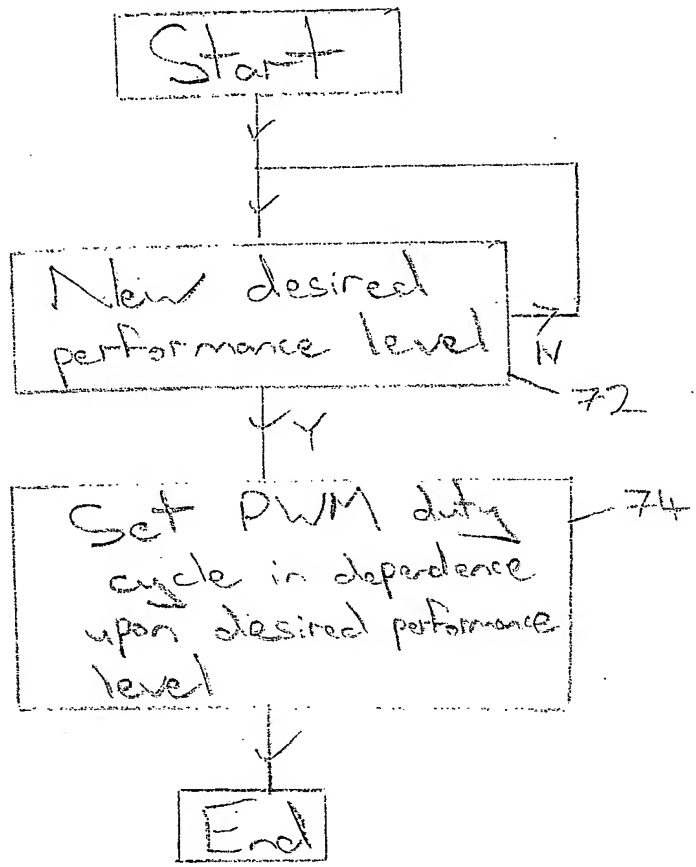



Fig. 10

Spore



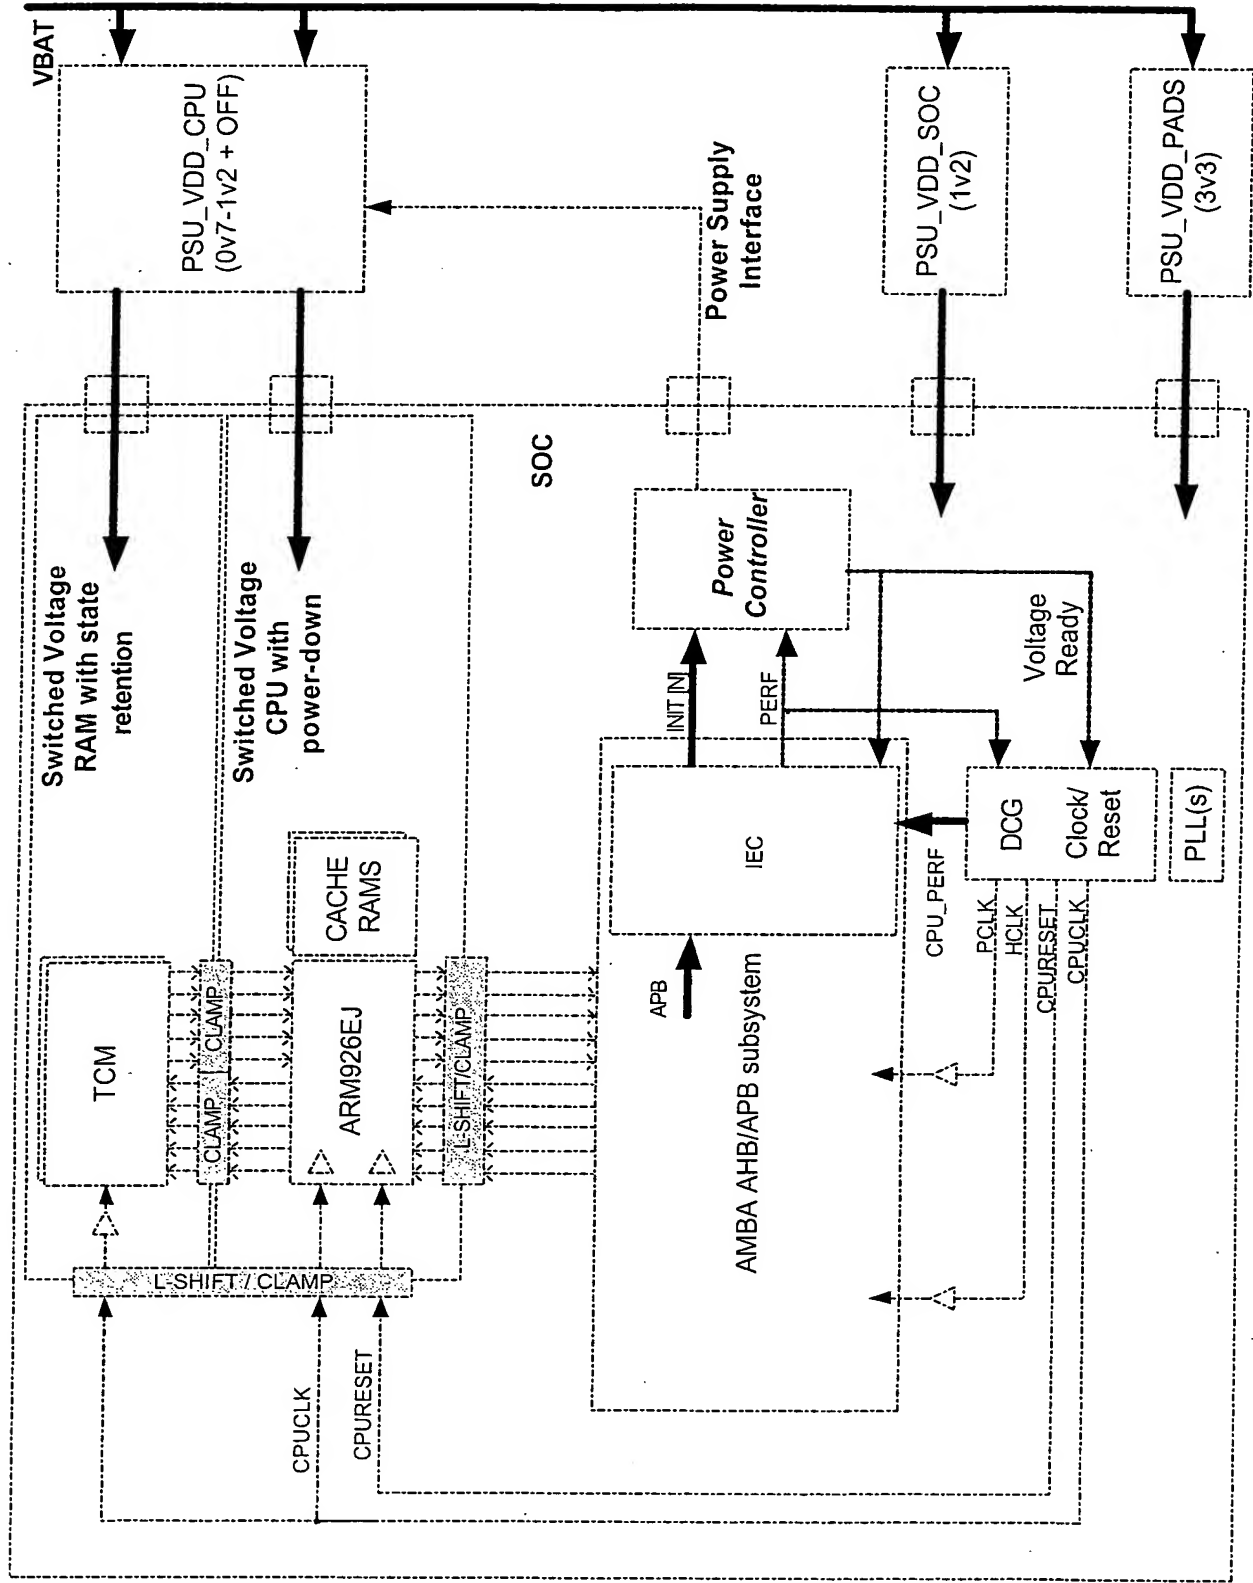

12/12

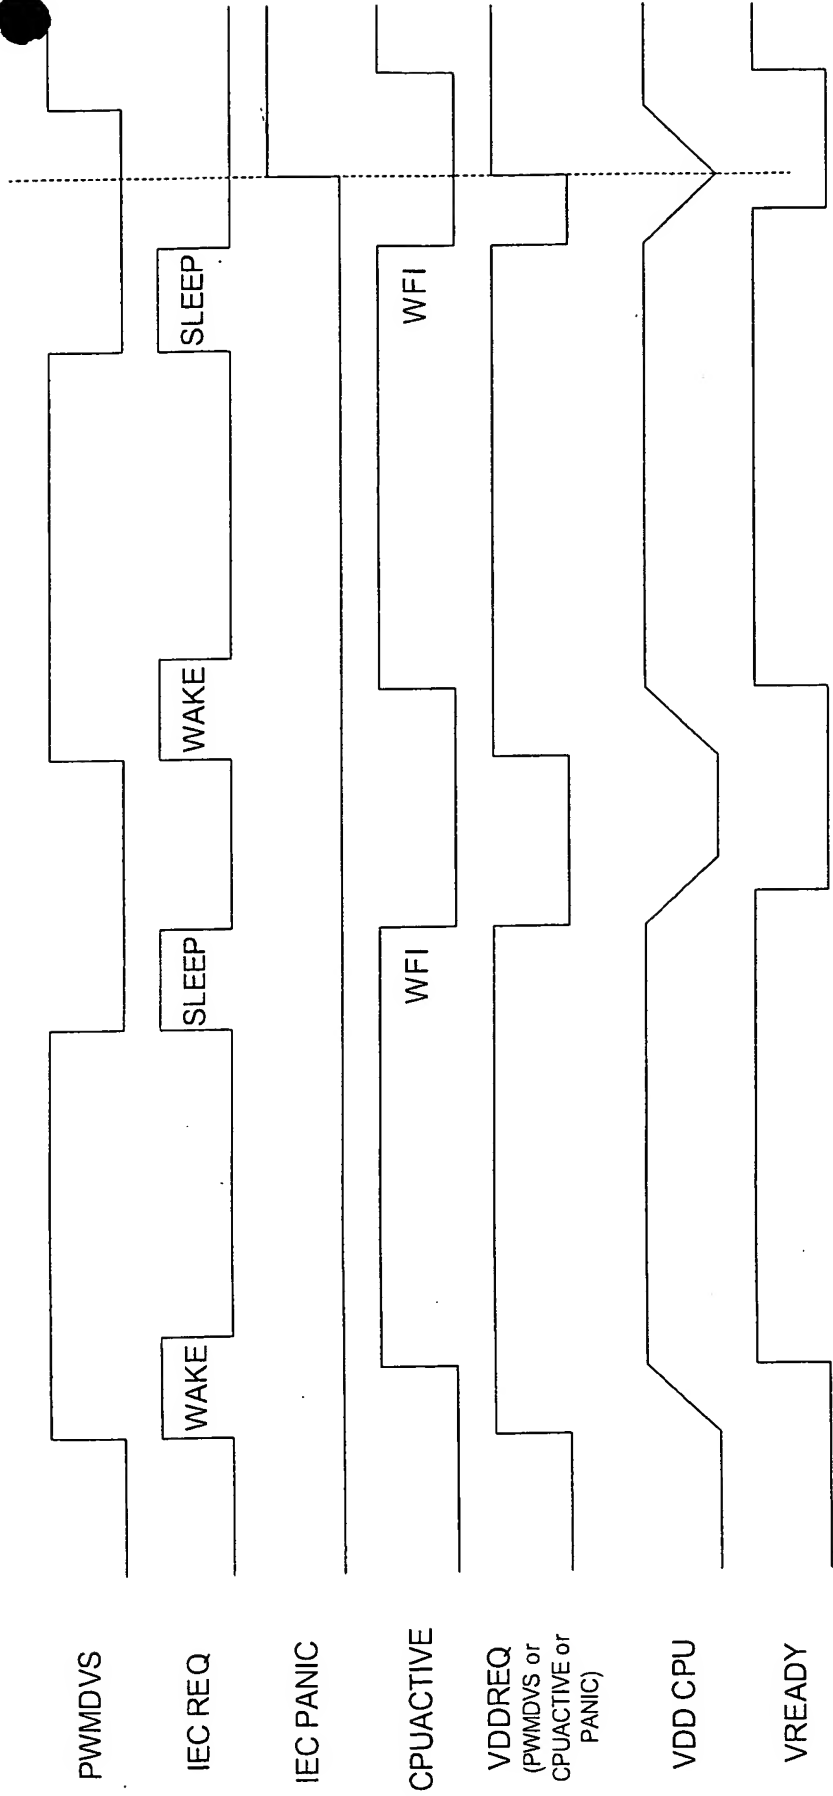

On panic ramp up fast  
(and potentially re-synch  
PWMDVS to avoid extra

PWMDVS\_waves\_A01

e.g. req 60%, actual 60% + sleep entry

Time slots >= 100us, 8/16/32 typically

Fig 12

Spec